



Puro F

Excellent soundproofing
and effective filtration



Here comes a splay trickle vent designed for those who expect top and uncompromising performance. Puro is perfect for effective sound attenuation, efficient air flow and precise filtering of pollution. It is also entirely invisible on the building's façade and almost imperceptible inside due to the hidden air intake and low-profile form of the controller.



A new air filter ensures even better filtration performance for more effective protection against harmful substances. Puro captures and retains impurities with the accuracy of a class F7 filter. This is an anti-smog mask for your home.

Puro F

Acoustic insulation	L ≥ 240 mm
trickle vent open	$D_{n,e,w} = 52$ (-1,-4) dB
trickle vent closed	$D_{n,e,w} = 57$ (-1,-5) dB

M5-class filter

Nominal flow [m³/h]	Δp = 10 Pa	Δp = 20 Pa
trickle vent open	25,6	37,0
trickle vent closed	7,1	10,3



M7-class filter

Nominal flow [m³/h]	Δp = 10 Pa	Δp = 20 Pa
trickle vent open	21,9	33,4
trickle vent closed	7,1	10,3

Control	automated with pressure difference, manual control
----------------	---

Materials	MDF, EPP, ABS/ASA, aluminium PU foams, Basotect® melamine foam
------------------	---

Trickle vent type	reveal-mounted trickle vent
--------------------------	-----------------------------

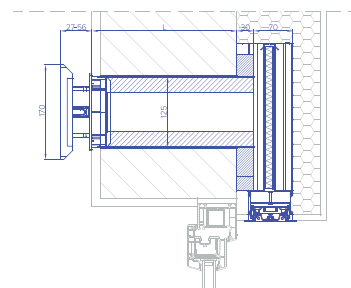

Cholerzyn 456
32-060 Liszki

tel: + 48 12 425 31 64
info@brevis.com.pl
www.brevis.com.pl