

Puro Lite

Incredible soundproofing
in a minimalist design



In an exceptionally compact form, it combines impressive functionality with the best noise reduction performance among simple wall air vents. Provided with the new aluminium intake, Puro Lite gains a minimalistic design and a vast range of customisation options.



With numerous refined solutions that simplify its installation and daily use, Puro Lite will fit perfectly into your façade where there is no space for a splayed reveal vent or where windows are flush with the façade.



Puro Lite offers noise reduction up to 60 dB, in order to meet even the most difficult challenges. This is an economical solution designed for projects with high acoustic requirements, where advanced functionality and pure form go hand-in-hand.

Puro Lite

Acoustic insulation	L ≥ 415 mm	
trickle vent open	$D_{n,e,w} = 53$ (-1; -4) dB	
trickle vent closed	$D_{n,e,w} = 60$ (-1; -6) dB	
Nominal flow [m³/h]	Δp = 10 Pa	Δp = 20 Pa
trickle vent open	29,6	40,6
trickle vent closed	7,1	10,7
Control	automated with pressure difference, manual control	
Materials	MDF, ABS/ASA, aluminium, PU foams, Basotect® melamine foam	
Trickle vent type	straight wall-mounted trickle vent	
Resistance to penetration by rainwater	600 Pa	

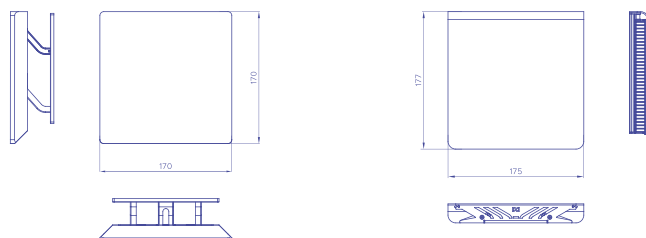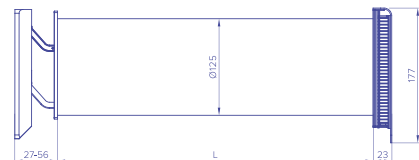

Cholerzyn 456
32-060 Liszki

tel: + 48 12 425 31 64
info@brevis.com.pl
www.brevis.com.pl